



TPC6000-C2153W-N

Industrial Panel PC



21.5" Full HD Fanless Industrial Panel
PC support Intel® Celeron™ J1900
support Intel® Celeron™ 3855U
support Intel® Core™ i5-7200U



TPC6000-C2153W-N




Specifications :

Processor	CPU	Support Intel®Celeron™ J1900 Support Intel®Celeron™ 3855U Support Intel® Core™i5-7200U
	Base Frequency	Dual Core 2.0 GHz / Dual Core 1.6 GHz / Dual Core 2.5 GHz
	L3 Cache	2MB / 2MB / 3MB
	Chipset	Integrated PCH-LP
	Memory	1 x 204-pin DDR3L-1333MHz SODIMM, support up to 8GB
	Storage Medium	1 x 2.5" SATA bay + 1 x mSATA
I/O	LAN	2 x Intel i210 1000Mbps RJ-45 with surge protection, lightning protection design and 15KV ESD protection
	Audio	Realtek ACL662 Audio controller
	USB	4 x USB3.0/2.0/1.1
	COM	2 x RS-232 / RS-485 with surge protection, RS485 support automatic flow control
	Expansion slot	1 x Mini-PCIe slot, extensible 3G/WIFI wireless card, 1 x EasyBUS slot
	Rear I/O	DVI-I / 2 x GLAN / 4 x USB / 2 x COM / 2 x PS2 / Line-out / Mic-in
Physical	Dimensions (W x H x D)	550mm x 342mm x 78mm (21.65" x 13.46" x 3.07")
	Drill Hole Size (W x H)	533mm x 325mm (20.98" x 12.80")
	NW	8.25kg
OS	OS	Windows 7, Windows 7 Embedded, Windows8, Windows10, Ubuntu, VXWORKS, QNX
Power	Input voltage	12-24VDC ±10% , support reverse polarity protection, overvoltage protection, overcurrent protection
	Maximum Power Dissipation	
LCD	LCD Size	21.5" Full HD TFT
	Resolution	1920 x 1080
	Colors	16.7MB
	Active Area (W x H)	476.64mm x 268.11mm (18.77 "x 10.56")
	Backlight	LED
	MTBF	30000hrs
	Pixel Pitch(H x V)	0.248 x 0.248
	Luminance	250cd/m2
	Contrast Ratio	3000:1
	Viewing Angle	(L) 89 / (R) 89 / (T) 89 / (B) 89
Touchscreen	Type	Multi-point capacitive touch screen
	Transmittance	> 87%
	Controller interface	USB
	Driver Support	Windows7, Windws 8, Windows 10, Linux
	Multi-touch	10 points (windows system)
	Surface Hardness	Mohs' Number 7H
Environmental	Work Temperature	0 ~ 45°C (32~113°F)
		0 ~ 45°C (32~113°F) (General temperature HDD/SSD)
	Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)
	Relative humidity	5~95% (Non condensation)
	Shake	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock	SSD applied: 10 G, IEC 60068-2-64, Half-sine wave, 11ms duration
	EMC	CE/FCC Class A
	Water-proof	Front panel IP65

Industrial Panel PC

www.nodka.com

Dimensions:

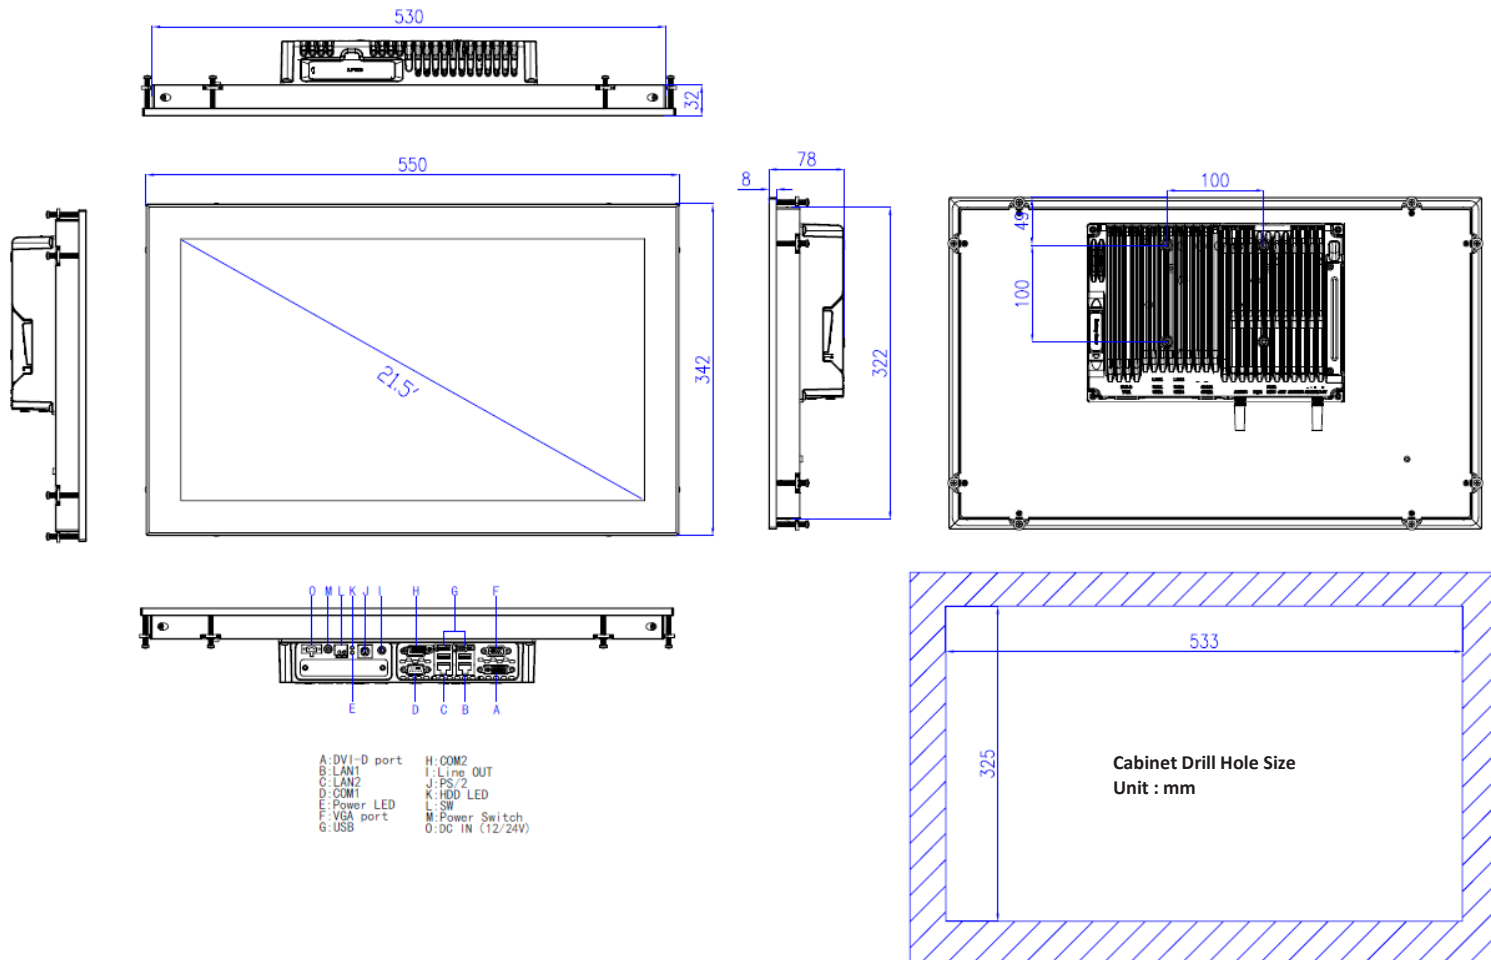

Ordering Information:

Product Code	Description
TPC6000-C2153W-N-J1900	21.5"LCD/Intel® Celeron™ J1900 2.0GHz Four core Processors/No Memory/No Hard Disk/2*RS-232/485(Optional)/2 Gigabit Ethernet ports/4*USB3.0/Capacitive Touch Screen/1920*1080/DC12V-24V input/Two-year warranty
TPC6000-C2153W-N-SL3855U	21.5"LCD/Intel® Celeron™ 3855U 1.6GHz dual-core Processors/No Memory/No Hard Disk/2*RS-232/485(Optional)/2 Gigabit Ethernet ports/4*USB3.0/Capacitive Touch Screen/1920*1080/DC12V-24V input/Two-year warranty
TPC6000-C2153W-N-SL7200U	21.5"LCD/Intel® Core™ i5-7200U 2.5GHz dual-core Processors/No Memory/No Hard Disk/2*RS-232/485(Optional)/2 Gigabit Ethernet ports/4*USB3.0/Capacitive Touch Screen/1920*1080/DC12V-24V input/Two-year warranty

Optional Equipment:

Option	Adapter 12V/60W 2 pin Phoenix terminal
Option	Chinese standard Power Line 1.8m
Standard	8*Hooks
Standard	Manufacturer Certificate
Standard	Warranty Card
Standard	Random Listing